



A HEXPOL COMPANY

Elastomeric *Type 80*

Rubber wheel with
polypropylene center

Non-marking rubber wheel

Ideal for shopping carts, airport carts, hospital applications and more!



Elastomeric Engineering
Co. Ltd
No: 371, Colombo Road
Bokundara, Piliyandala
Sri Lanka
Tel: +94 11 4212722
Fax: +94 11 2518525
www.stellana.com



Rubber Wheel


Polypropylene center - Type 80

The Elastomeric type 80 rubber wheel has a clean ergonomic design with high load capabilities. The polypropylene center is injected into the rubber ring to ensure optimum performance of the wheel.


Size	3"	4"	5"
Unit	Inches & lb.	Inches & lb.	Inches & lb.
Article No	EEC 3"	EEC 4"	EEC 5"
Outer diameter (D1)	3"	3 -15/16"	4 -15/16"
Tire Width (T1)	1"	1 -3/16"	1-1/4"
Hub Length (T2)	1 - 9/16"	1 -7/16" or 1 - 9/16"	1 - 7/16" or 1 - 9/16"
Bore Diameter (D2)	5/16"	5/16"	5/16"
Bearing	6202 ZZ	6202 ZZ	6202 ZZ
Material - Ring	Natural Rubber	Natural Rubber	Natural Rubber
Hardness* (Shore A)	80-85	80-85	80-85
Material - Center	Polypropylene (PP)	Polypropylene (PP)	Polypropylene (PP)
Material - Hub Cap	High Modulus PP	High Modulus PP	High Modulus PP
Standard Color* - Rubber Ring	RAL 7000	RAL 7000	RAL 7000
Standard Color* - Hub / Hub cap	RAL 7001	RAL 7001	RAL 7001
Dynamic Load Capabilities**	165	187	220

* Can be changes as per the requirements


** Load bearing capacity according to EN12532

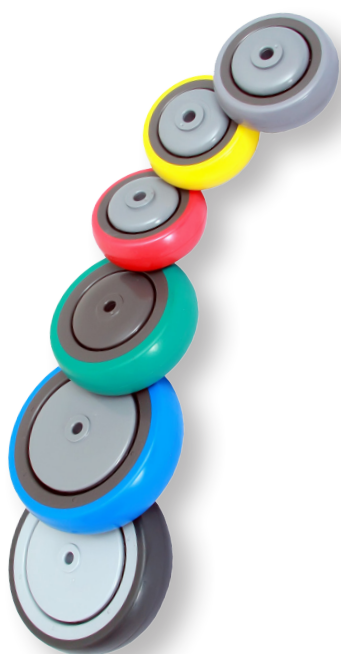

EEC 3"

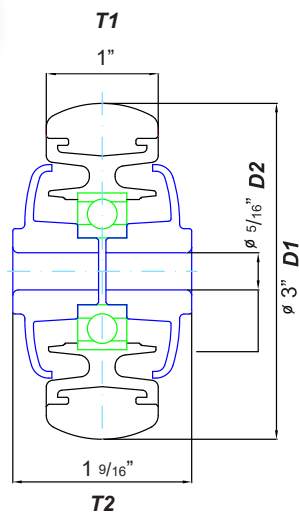

EEC 4"

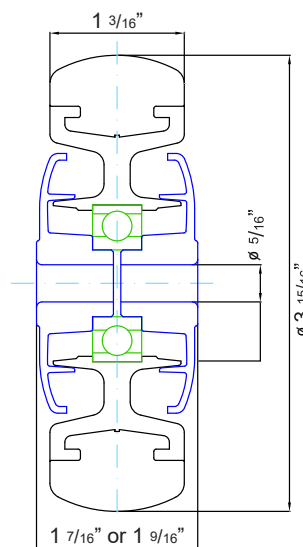

EEC 5"

