



A HEXPOL COMPANY

Elastomeric *Type 60*

Rubber rings with Polyamide
and Polypropylene center

- *Color rubber wheels for non marking applications*
- *Floor Protecting • Maintenance Free • Noiseless*



Rubber Wheel

Polypropylene and Polyamide center - Type 60

Temperature range -20° C to +70° C


Load Capacity 50 - 200Kg

Hardness 80 +/-5 Shore A



Dimensions

Art. No	Art. No.	Diameter	Tread Width	Hub Length	Hub Diameter	Hub Bore	Bearing
Black	Grey	D	B	N	/ O	d	
ECC 8110	ECC8400	80	25	35	18	12	Plain
ECC8122	ECC8412	80	25	35	32	12	Roller
ECC8130	ECC8420	80	25	40	18	12	Plain
ECC8142	ECC8432	80	25	40	32	12	Roller
ECC8190	ECC8480	100	30	40	22	12	Plain
ECC8202	ECC8592	100	30	40	32	12	Roller
ECC8290	ECC8580	125	38	45	22	15	Plain
ECC8302	ECC8592	125	38	45	32	15	Roller
ECC8330	ECC8520	160	40	60	30	20	Plain
ECC8342	ECC8632	160	40	60	42	20	Roller
ECC8350	ECC8640	200	50	60	32	20	Plain
ECC8362	ECC8652	200	50	60	46	20	Roller

Note: Other hub lengths and hub bores are available on request.

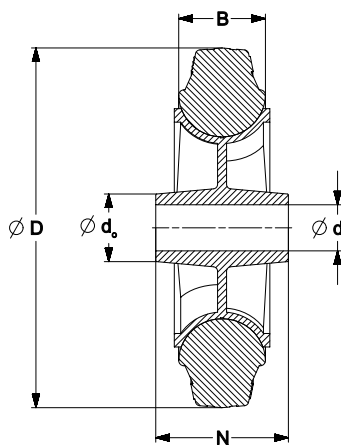

Plain Bearing

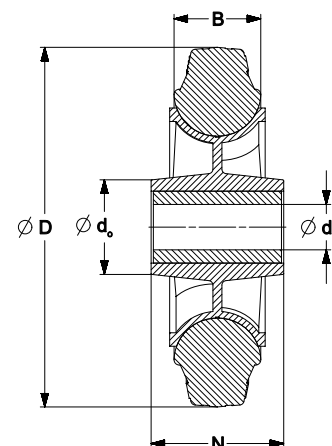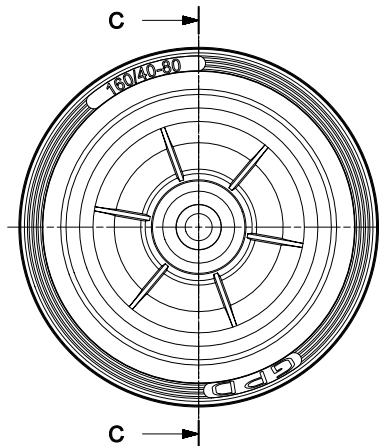

Roller Bearing

